


JSL – Material Eléctrico, S.A.

Product: Saddles type 200

Reference: 201 | 202 | 211 | 203 | 204 | 205 | 208 | 206 | 209 | 207 | 210

Ref.	A	B	C	D	E	F	IEC	PG	IRO
201	18	12	10	22,8	8,7	16	12	-	11
202	20,7	14,4	10	24,9	10,3	16	-	9	13,5
211	21,5	15,3	10	25,6	11	16	16	11	-
203	24,7	17,5	10	27,9	12,5	16	-	-	16
204	28	19,6	10	29	14,2	16	20	13,5	19
205	30,4	21,5	10	31,8	15,5	16	-	16	21
208	32,2	24,3	10	34,1	17,4	16	25	-	23
206	36,5	27,5	10	37	19,8	16	-	21	-
209	40,4	30,8	10	40,6	21,7	16	32	-	29
207	47,3	35,5	10	46,9	25,4	16	-	29	-
210	50,2	37,9	10	47,7	26,9	16	40	-	36

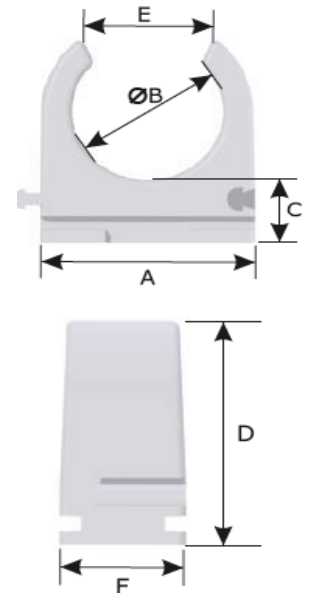

PRODUCT CHARACTERISTICS

Type of Material	Thermoplastic	Color Available	Gray Light ivory Black White
Fixing support	Plug & screw or M6 plug	Electrical properties	Electrical insulation
Application	Pressure	Chemical properties	Resistant to acid & alkaline solutions Resistance limited to solvents
Self-extinguishing	650 °C	Others	UV Resistant Low smoke content Halogen free
Operating temperature	-15°C +90°C		

APPLICABLE STANDARDS

EN 61386-25 - Conduit systems for cable management - Part 25: Particular requirements - Conduit fixing devices