


TECHNISCHE VERLICHTING

WATER & STOFPROOF

BEAM 0830

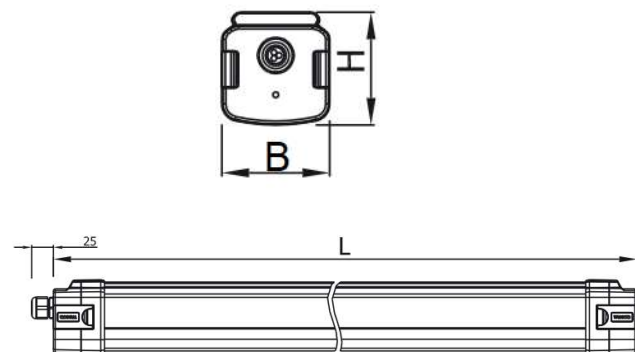

TECHNISCHE GEGEVENS

Benaming	Beam 0830
LxBxH	1540 x 76 x 80mm
Klasse	LED
Richtbaar	Nee
Dimbaar	DALI dimbaar
Vermogen	58W – 72W dmv Switch
Voltage	220-240V 50/60Hz
Lichtkleur	3000K / 4000K / 5000K
Stralingshoek	30° / 60° / 90° / 120°
Lichtstroom	140 Lm/W
CRI	>83
IP	67
PF	>0.9
IK	10
Flux code 75W 60°	72 89 97 95 100

PRODUCTEIGENSCHAPPEN

- o 3m tot 20m hoog te plaatsen.
- o 75W driver
- o Tri-Proof Light
 - Water-proof
 - Stof-proof
 - Corrosie-proof
- o Lichtkleur en Stralingshoek doorgeven bij bestelling. (afhankelijk van hoogte)
 - Beam 0830/3000 + stralingshoek
 - Beam 0830/4000 + stralingshoek
 - Beam 0830/5000 + stralingshoek
- 30° 13m - 20m
- 60° 8m - 12m
- 90° 5m - 7m
- 120° < 5m
- o Ophangstelsel verkrijgbaar
 - Beam 0813: Beugel voor plafond
 - Beam 0814: Pendel staalraad 6m
 - Beam 0815: Pendel ketting 2m

